



# VELFAC 200 accessories


## Handles, ventilation and security fittings

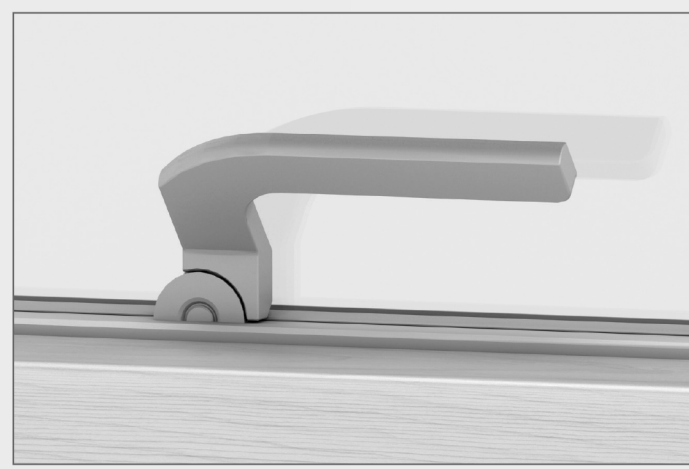


Espagnolette. Standard in all open functions.

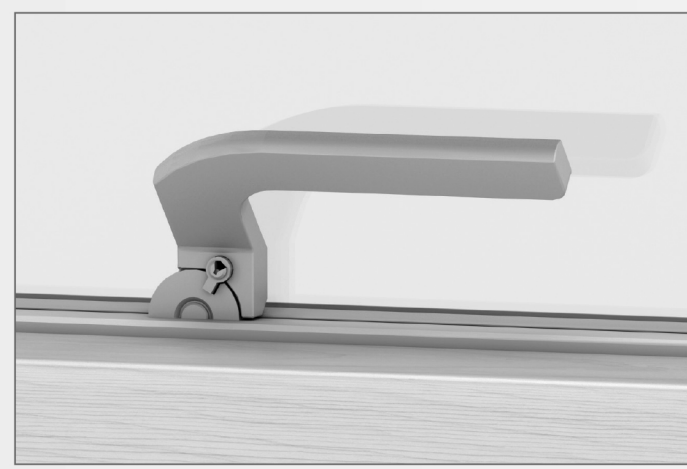

Espagnolette with lock. Supplied with lock and key for extra security.

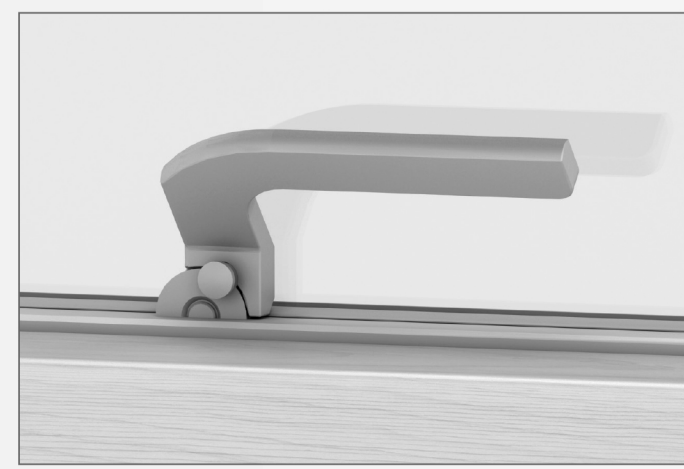

Espagnolette with child-lock. Supplied with child-lock button.

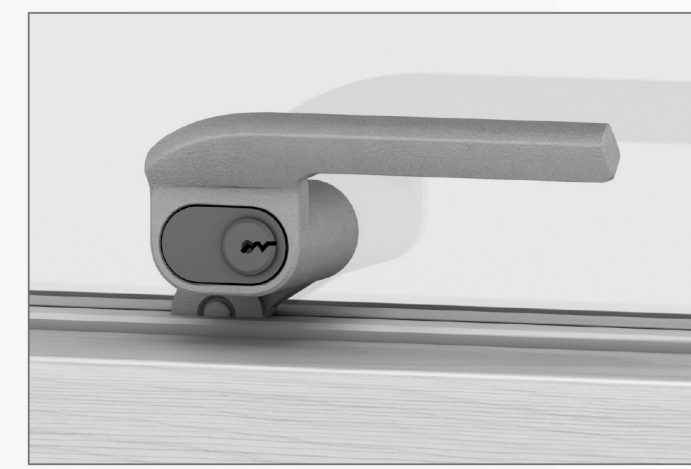

Espagnolette for cylinder lock. Supplied with or without lock and key.



Flushbolt for operation of the mullion in 2-leaf elements.




Standard restrictor w/ventilation position lock. Not available for sliding casement door.



Electric opener for remote operation for windows. Can be computer controlled for fully naturally ventilated projects. Fully concealed in the frame. Three chain lengths offering 60mm, 210mm and 440mm clear opening.



Lockable restrictor. Not available for sliding casement door.

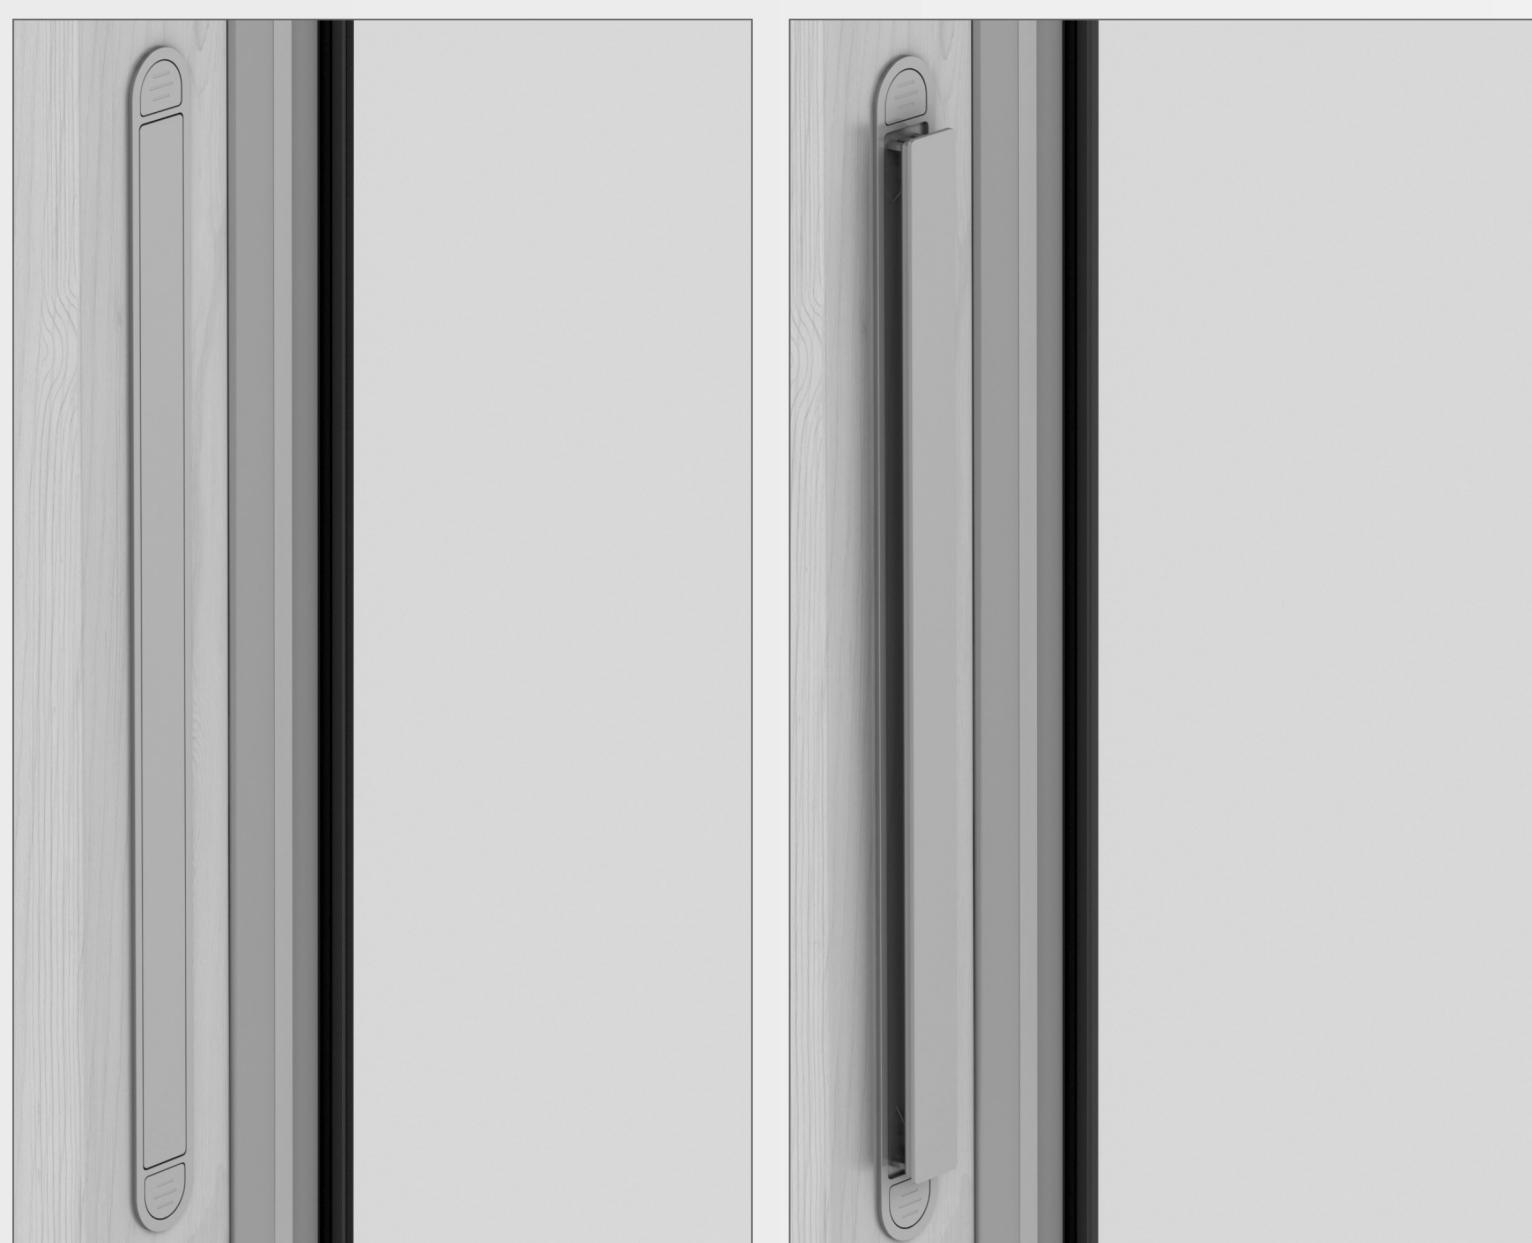

Click vent. Anodized surface finish. Fully concealed. Free ventilation opening in elements with 24mm glazing: 4000mm<sup>2</sup>. Free ventilation opening in elements with 48mm glazing: 3000mm<sup>2</sup>. For the equivalent free opening, please refer to our website.



Ventilation position. The striking plate allows a 5mm night ventilation opening for all espagnolette handles.



Acoustic trickle vent. The vent is machined into a timber packer with an external aluminium profile in the same colour as the window sashes. Documentation on air flow can be requested. Achieves a sound reduction value of Dn,e,w 40 dB.